

PKCELL

SHENZHEN PKCELL BATTERY CO., LTD

6F22

Specifications for Non-Hg Super heavy duty Battery

Compiled by: Zhijiang Li

Checked by: Beiqian Ding

Date: January 1, 2000

Product Model: PKCELL-6F22-9V

Website: www.pkcell.net

E-mail: pkcell@pkcell.net

(The manufacturer keeps privilege to modify the product specifications and data without notice)

Specifications for Non-Hg 6F22 Super heavy duty Battery

1 Product Model

6F22

2 Chemical System


Zinc - Manganese Dioxide Battery

3 Specification (mm)

Height: max 48.5 min46.5

Length: max 26.5 min24.5

Width: max 17.5 min15.5

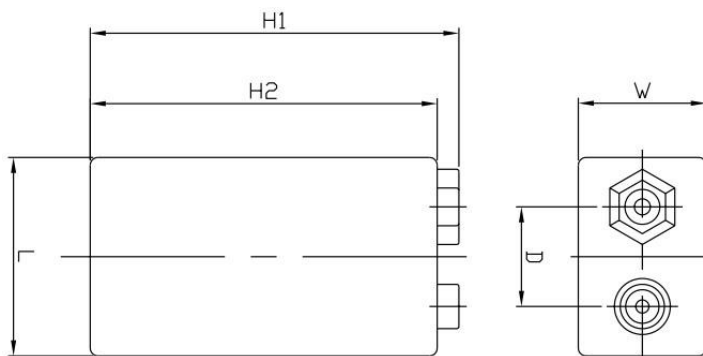

4 Nominal Voltage: 9.0 V

5 Storage Performance

After 12 months storage at specified conditions, discharge capacity should be no less than 70% of the original discharge capacity.

6 Mercury Content: Less than 1ppm

7 Electrical Performance: (620Ω, 0.3S, 20±2°C)

/	Open Circuit Voltage (V)	Closed Circuit Voltage (V)	Short Circuit Current (A)
Initial period	Above 9.6	Above 8.6	Above 0.6
After 12 months	Above 9.2	Above 8.2	Above 0.5

8. Discharge Capacity (20±2°C, R H: 45%~75%)

Load	180Ω	620Ω
Discharge way	0.5h/d	2h/d
Final voltage	4.8V	5.4V
Initial period	6h	24h

Pls check the sketch map as following

9. Performance

(1)Spillage proof test at over-discharge

The number of samples: 9

Test condition: 20±2°C, relative humidity 45%-75%

Test method: 180Ωcontinuous discharge for 24 hours

Requirements: no spillage at eyesight, the distortion of total height of the battery will not exceed 0.2mm, the max allowable value.

Standard: 0/9

(2) Spillage proof test at high temperature

The number of samples: 20

Test condition: $45\pm 2^{\circ}\text{C}$, relative humidity 85%-95%

Test method: Under the prescriptive test conditions, the samples are stored for 10 days. Then they are took out and placed under $20\pm 2^{\circ}\text{C}$, relative humidity 45%-75% conditions for 4 to 24 hours for observation.

Requirements: no spillage at eyesight, the distortion of total height of the battery will not exceed 0.2mm, the max allowable value.

Standard: 0/20

10. Safety performance

The performance of explosion protection due to the external short circuit

The number of samples: 10

Test condition: $20\pm 2^{\circ}\text{C}$, relative humidity 45%-75%

Test method: Under the prescriptive test conditions, external short circuit lasts for 24 hours

Requirements: no separation occurs between the negative terminal and the body of the battery.

Standard: 0/10

11. Guarantee period: 1 years

12. Label on the product:

The following items are labeling on the battery surface:

(1) Model: 6F22

(2) Trademark: PKCELL

(3) Nominal voltage: 9.0 V

(4) Polarity: “+”“—”

(5) Precautions: Do not attempt to recharge a battery, and Do not dispose of batteries in fire.

(6) Manufacturer: Pkcell

13. Precautions of use:

(1) Since the battery is not manufactured for recharging, there are risks of electrolyte leakage or causing damage to the device if the battery is charged.


(2) The battery shall be installed with its “+” and “-” polarity in correct position, otherwise may cause short-circuit.

(3) Short-circuit, heating, disposing of into fire and disassembling the battery are prohibited.

(4) Battery cannot be forced discharged, which lead to excess gassing and may result in bulging leakage and de-crimping of cap.

- (5) New and used batteries cannot be used at the same time,when replaced batteries recommend to replace all and with the same brand type.
- (6) Exhausted batteries should be removed from compartment to prevent over-discharge,which cause leakgae damage to the device.
- (7) Direct soldering is not allowed,which will damage the battery.
- (8) Battery should be kept out of the reach of children to prevent swallow,in case of accident should contact physician at once.

Schematic diagram of discharge:

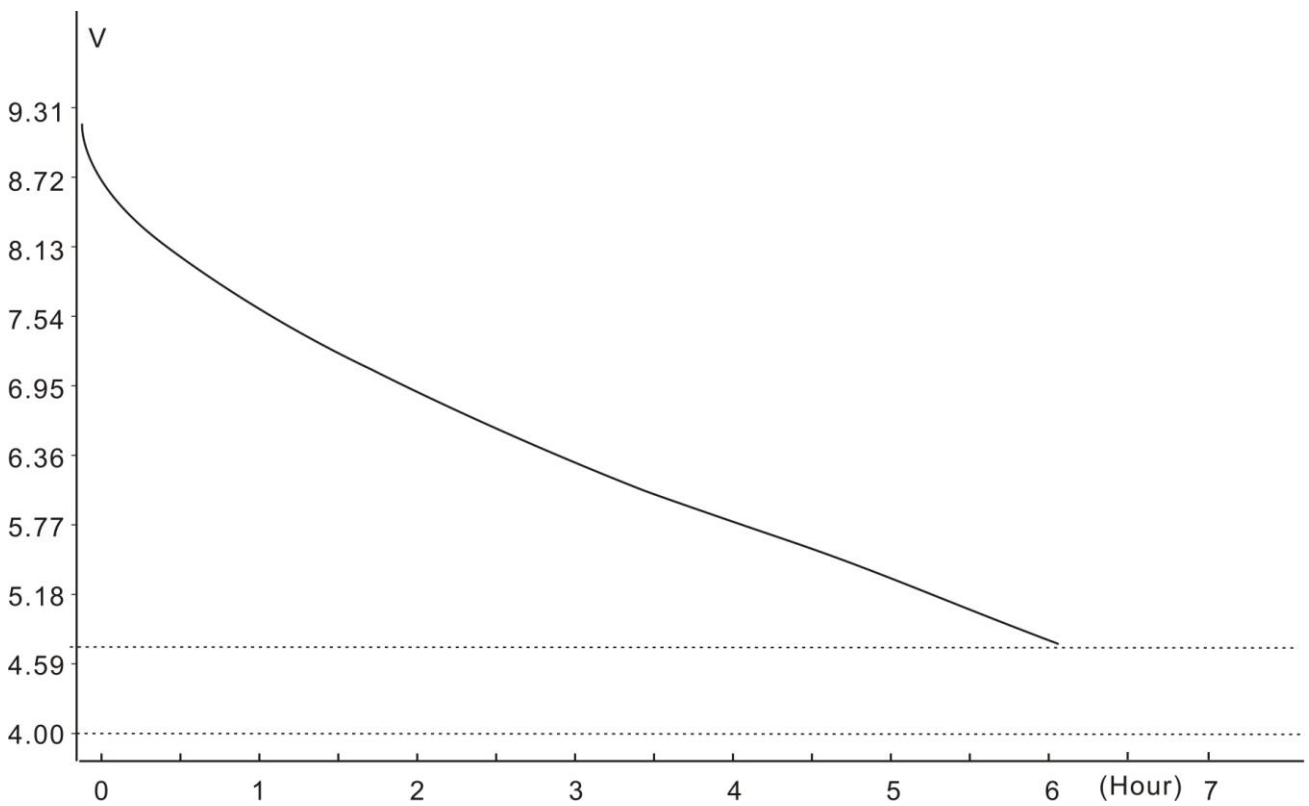

discharge Load: 180Ω

